

3 Door Sillend P/T - BPU21



Sill mounted Application - (Replacement for Slide bar)



Characteristics:

Performance Pretensioner


- *Dual cable* Design -Horizontal pull In
- Integrated Gas generator with Wire
- Double Cable - 4mm dia / steel roller
- **Pull-in Variable: 120 mm** (without Belt Slack)
- Cable / tube length can vary to suit application
- Weight: 340 g
- Tensile Strength: >15 kN
- Return Lock: < 5 mm
- Low Emissions Micro gas generator
- Meets worldwide EMV & ESD spec.

Main Features

- Slim Package, Sill mounted
- High Pull-in Performance
- Slider bar application
- Low Noise
- Low Emission
- Low Weight

Advantage

- The KSS design is the only 3door pretensioner on the Market to date.

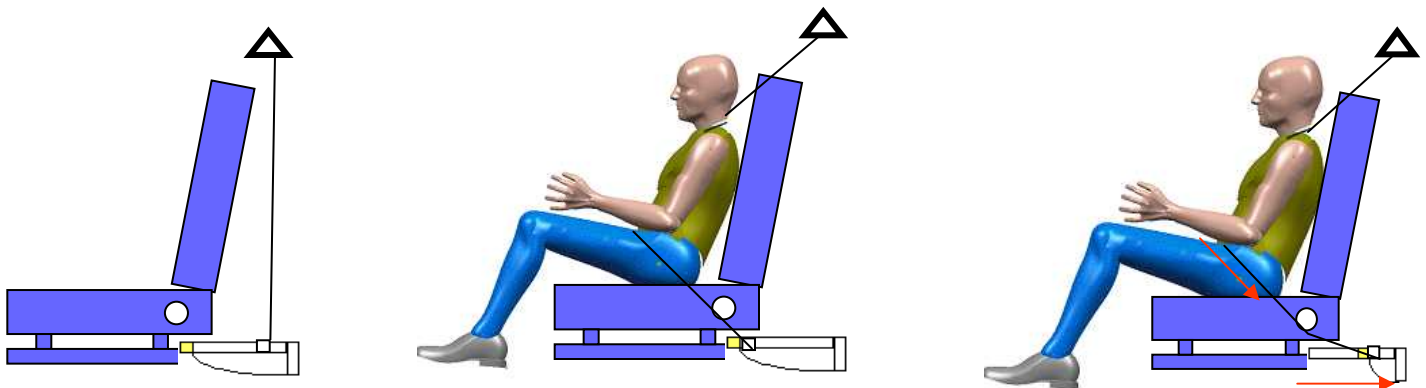

PSB application